

# PORTLIGHTS



set screw to be adjusted for water tightness.

LS, LSO, LSR, LO, LE, LR (Model No.0512-0818) adopt Anti-UV, Anti-rubbing. Polycarbonate sheet clear 8mm without storm cover that meet with CE approval. Then its part no. will become PLS, PLSO, PLSR, PLO, PLE, PLR for ordering. According to ISO/DIS 12216 for Area I II III IV designs for craft type "any".

- **CE Approved. According to ISO/DIS 12216**  
**LS, LSO, LSR type are approved for Area III, IV, designs for craft type "any".**  
**CLS, CLSO, CLSR type approved for Area I, II, III, and IV, designs for craft type "any".**

- 316 stainless steel machined rolled frames hand polished and electro polished to provide long lasting protection against corrosion.
- Cast 316 stainless steel hinges with set screw to adjust gasket pressure.
- Weather resistant thermo-plastic Sanplane gasket.
- High Strength tempered clear glass.
- Optional fiberglass screens with rubber gaskets to ensure a tight fit on the inside of the opening port.
- Straight or angled spigots available.
- Off-white powder coating available.
- Standard ports are with plastic black knob as closing handle. This handle can be changed into s/s ring.
- Fixed or removable storm cover available.




Model No.0512 ~ 0818

Model No.1020 ~ 1228

Additional "STAY" can be added, if you like.

Glass colors available




(Standard) Clear

Tanned


Tint blue

Tint Grey


C x D-CUTOUT SIZE

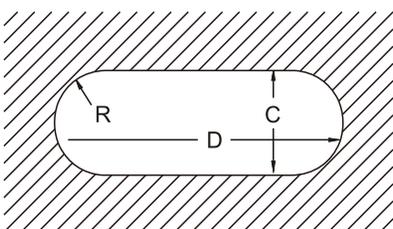

OVAL PORTHOLES

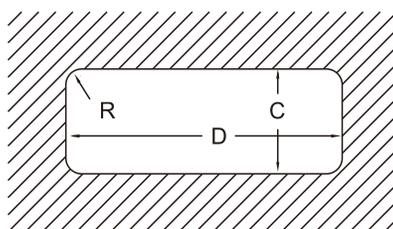

RECTANGULAR PORTHOLES

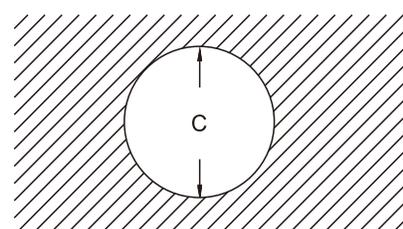

ROUND PORTHOLES